

MESSRS.

SPECIFICATION FOR APPROVAL

承 認 書

Product	MAGNETIC BUZZER (INDICATOR)
Part No.	AB-2317061-W
Customer Approval	

Approved By	Checked By	Made By



ADVANCED ACOUSTIC TECHNOLOGY CORP.

苙 翔 科 技 股 份 有 限 公 司



ISO 9001 Certified

2F, No.207, Sec. 6, Chung Shan N. Rd., Taipei, Taiwan, R.O.C.

Tel: +886-2-88665255

Fax: +886-2-88665250

E-mail: aat_mail@seed.net.tw

AB-2317061-W

Items		Units	Specifications	Conditions
1	Rated Voltage	VDC	6	
02	Operating Voltage	VDC	4~8	
03	Mean Current	mA (Max)	25	Applying rated voltage,
04	Sound Output	dB (min)	75	Distance at 20cm, applying rated
05	Tone Nature	single		
06	Resonant Frequency	Hz	400 ± 100	
07	Operating Temp.	°C	-10 ~ +60	
08	Storage Temp.	°C	-10 ~ +70	
09	Weight	Gram	10	
11	Terminal	Lead wire/lead pin material		AWG26# UL1095 Lead Wire

※ Standard Conditions:

Temperature 15 ~ 35°C



Humidity 25 ~ 80 %


Air pressure 860 ~ 1060 HPa.

If the result is doubtful, should retested with the conditions below: Temp. $20 \pm 2^\circ\text{C}$, Humidity 60 ~ 70 %, Air pressure 860 ~ 1060 HPa.

※ Note: As this product is not protected from foreign material entering, please make sure that any foreign materials(e.g. magnetic powder, washing solved, flux, corrosive gas)do not enter this product in your production processes. The functional degradation(e.g. SPL down)may occur if foreign material enter it.

Characteristic

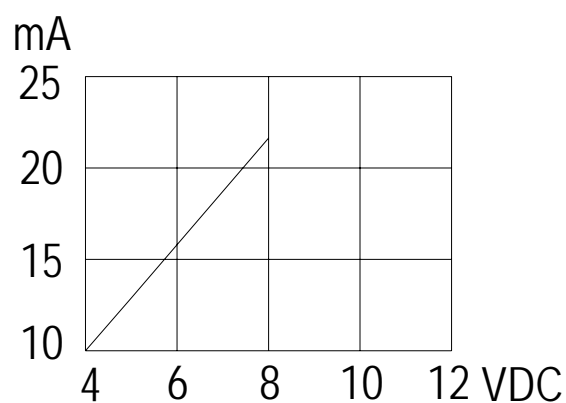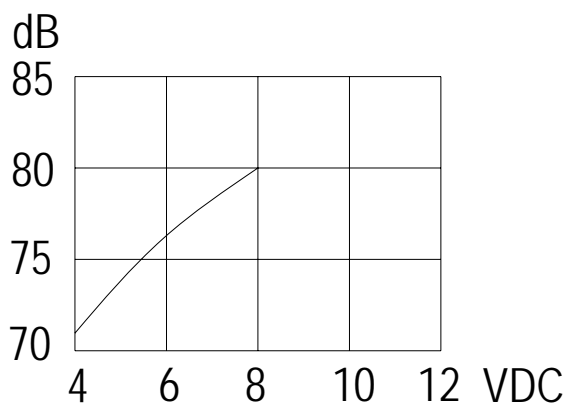

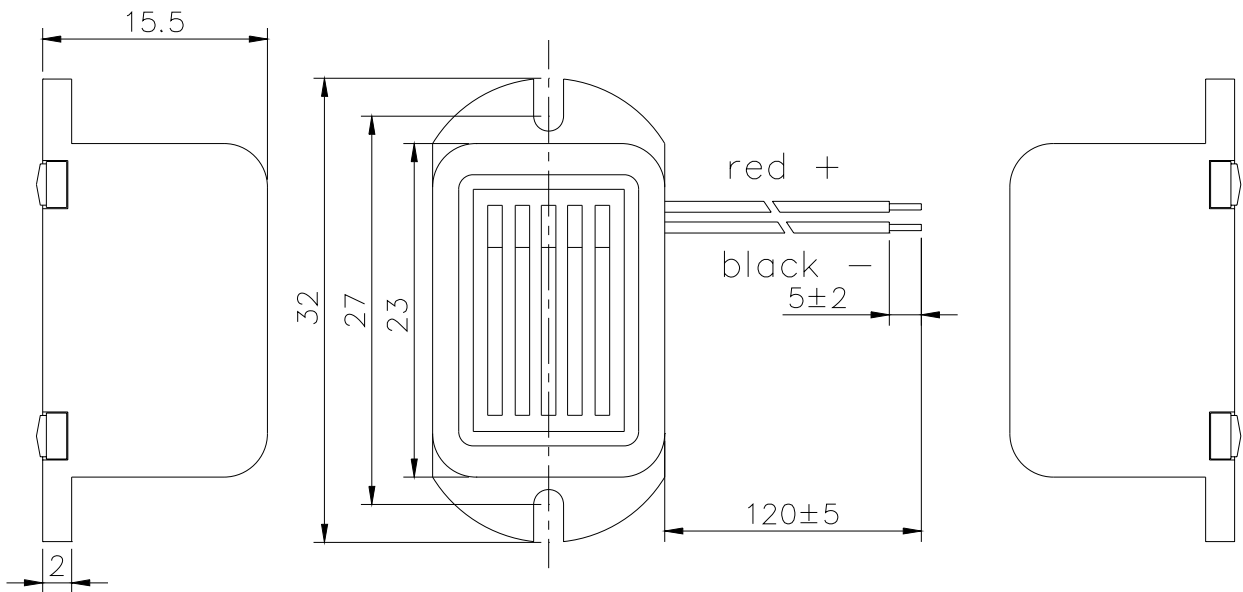

TITLE: SOUND TRANSDUCER DIMENSIONS		DRAWN: <i>Milton</i> 05/17/2001	SCALE: 2/1	SHEET: 1 OF 1
PART NO. AB-2317061-W	1	DESIGNED: R&D OF AAT	UNITS: mm	
DWG NO. DTB-1004		CHECKED:	TOLERANCE ± 0.5	
REV		APPROVAL:	UNLESS OTHERWISE SPECIFIED: ONE PLACE DECIMAL \pm *** TWO PLACE DECIMAL \pm *** THREE PLACE DECIMAL \pm ***	
		MATERIAL: ABS		





苙翔科技股份有限公司
ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

ADVANCED ACOUSTIC TECHNOLOGY CORP.

苙翔科技股份有限公司

RELIABILITY TEST

AB-2317061-W

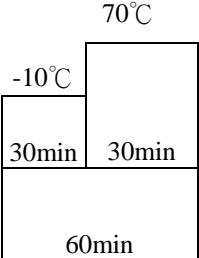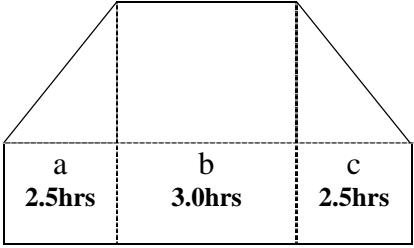Item	Test conditions	Evaluation standard
01 High temp. Storage life	The part shall be capable of withstanding a storage Temperature of 70°C for 96 hours.	After the test the part shall meet specifications without Any degrance and performance except S.P.L S.P.L shall be 67dB or more.
02 Low temp. Storage life	The part shall be capable of withstanding a storage Temperature of -10°C for 96 hours.	
03 Temp. cycle	The part shall be subjected 10 cycles. One cycle shall consist of; <div style="text-align: center;">  <p>The diagram shows a rectangular cycle with a total width of 60min. The top edge is divided into two segments of 30min each. The left segment is labeled -10°C and the right segment is labeled 70°C.</p> </div>	
04 Temp./Humidity cycle	The part shall be subjected 10 cycles. One cycle shall be 8 hours and consist of; <div style="text-align: center;">  <p>The diagram shows a trapezoidal cycle with a total width of 8 hours. The bottom edge is divided into three segments: 'a' (2.5hrs), 'b' (3.0hrs), and 'c' (2.5hrs). The left vertical edge is labeled 25°C and the right vertical edge is labeled 95°C. Dashed vertical lines separate the segments.</p> <p>a,b:90~98%RH c :80~98%RH</p> </div>	

ADVANCED ACOUSTIC TECHNOLOGY CORP.

苙翔科技股份有限公司

RELIABILITY TEST

AB-2317061-W

Item	Test conditions	Evaluation standard
05 Vibration	The part shall be subjected to a vibration cycle of 10Hz to 55Hz to 10Hz in a period of 1 minute. Total peak amplitude shall be 1.52mm (9.3G). The vibration test shall consist of 2 hours per plane in each three mutually perpendicular planes for a total time Of 6 hours.	After the test the part shall meet specifications without Any degraance and performance except S.P.L S.P.L shall be 67dB or more.
06 Fixed drop	The part shall be mounted on 100g jig(standard pc board) and dropped from a height of 152cm onto a concrete floor 5 times in each 6 planes. (a total of 30 times)	
07 Free drop	The part only shall be dropped from a height of 75cm onto a 40mm thick wooden board 3 times in 3 axes (X.Y.Z). (a total of 9 times).	
08 Operating life	1. Ordinary temperature The part shall be subjected to 1000 hours at room temperature ($25 \pm 10^{\circ}\text{C}$)with 6V 400Hz applied. 2. High temperature The part shall be subjected to 500 hours at 60°C with 6V, 400Hz applied. 3. Low temperature The part shall be subjected to 500 hours at -10°C with 6V, 400Hz applied.	