

MESSRS.

SPECIFICATION FOR APPROVAL

承 認 書

Product	PIEZO BUZZER
Part No.	AZ-1448E-W-LF (RoHS)
Customer Approval	

Approved By	Checked By	Made By
工程部 王台平 MAR-29-2007	工程部 劉民祥 MAR-29-2007	工程部 許俊程 MAR-29-2007



ADVANCED ACOUSTIC TECHNOLOGY CORP.

苙 翔 科 技 股 份 有 限 公 司



ISO 9001 Certified

2F, No.207, Sec. 6, Chung Shan N. Rd., Taipei, Taiwan.

Tel: +886-2-88665255


Fax: +886-2-88665250

<http://www.aatc.com.tw>


AZ-1448E-W-LF

Items		Units	Specifications	Conditions
01	Rated Voltage	Vp-p	10	(square wave)
02	Operating Voltage	Vp-p	1~30	
03	Rated Current	mA(Max)	10	At 10Vp-p
04	Sound Output At 10cm	dBA(Min)	85	At 4.8KHz / 10cm
05	Resonant Frequency	Hz	4800±500	
06	Capacitance	pF	15000±30%	At 120Hz
06	Operating Temp.	°C	-20 ~ +70	
07	Storage Temp.	°C	-30 ~ +80	
08	Weight	g	1	

STANDARD TEST FIXTURE

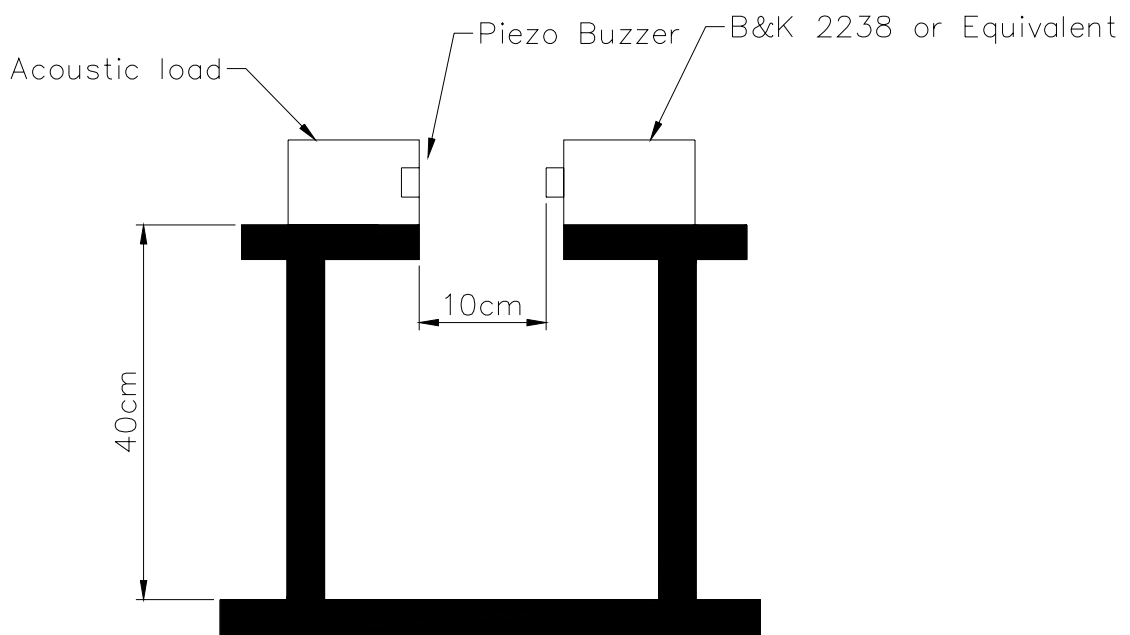


Standard test condition of piezo buzzer

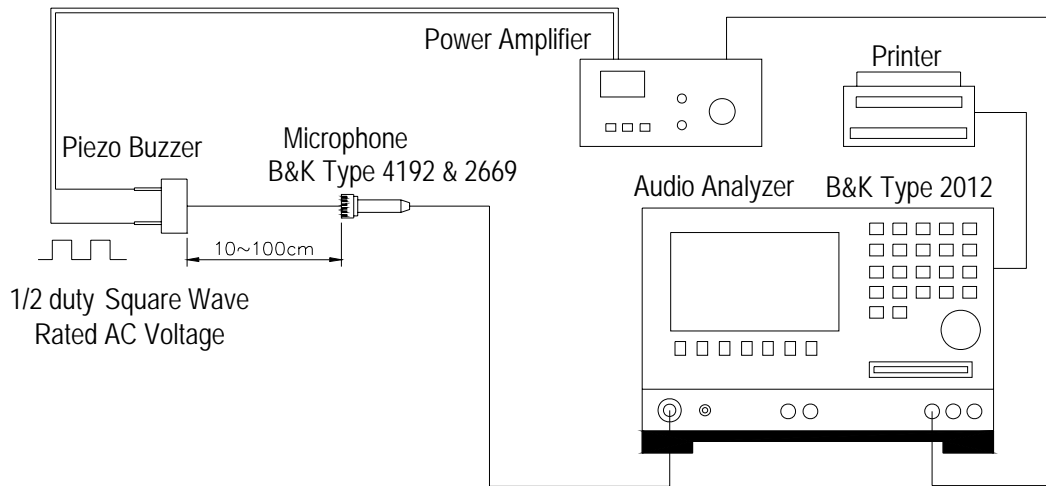

FREQUENCY RESPONSE CURVE

MODEL:AZ-1448E-W


A: Frequency Response, Magn dB re 20.00 μ PA

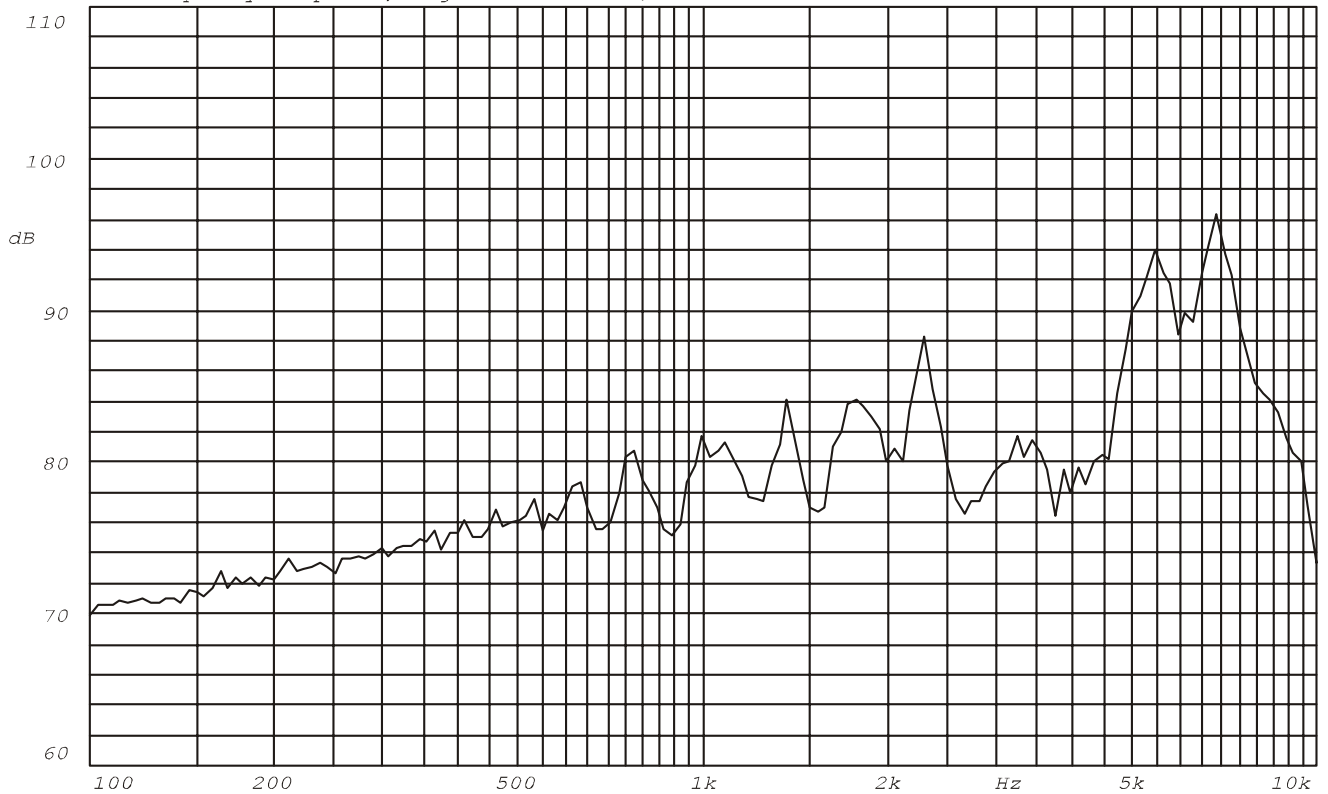

Mode: SSR



REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

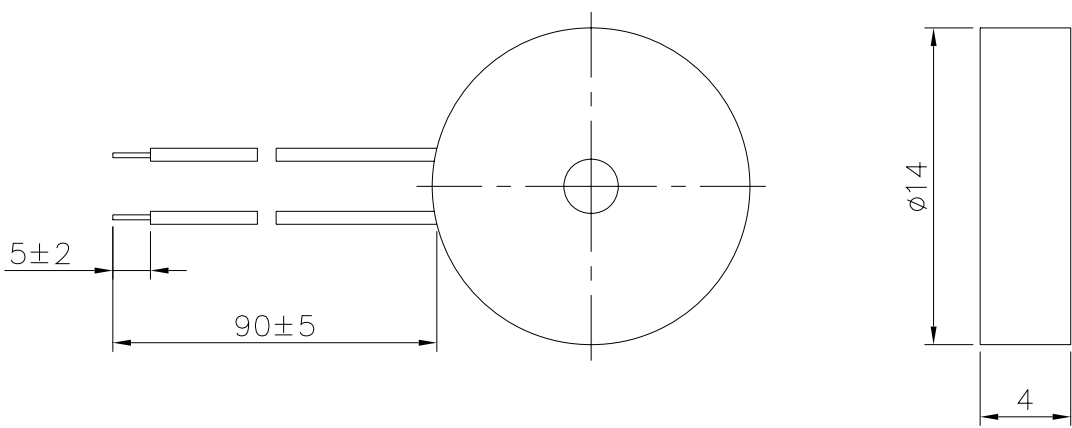

TITLE:	PIEZO BUZZER	DRAWN:	Milton	08/14/2001	SCALE:	3:1	SHEET:	1 : 1
PART NO.	AZ-1448E-W-LF	DESIGNED:	R & D OF AAT		UNITS:	mm		
DWG NO.	DPT-1032	CHECKED:			TOLERANCE	± 0.3		
		APPROVAL:			UNLESS OTHERWISE SPECIFIED:	ONE PLACE DECIMAL \pm ***		
		MATERIAL:	MPP0			TWO PLACE DECIMAL \pm ***		
						THREE PLACE DECIMAL \pm ***		



苙翔科技股份有限公司
 ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

ADVANCED ACOUSTIC TECHNOLOGY CORP.

苙翔科技股份有限公司

RELIABILITY TEST

Item	Conditions	Evaluation standard
01 Low Temp. Storage Test	A°C±2°C ,240Hr	(S.P.L)Test before numerical ±10dB *wrong (Frequency)Test before numerical ±10% (Current)Test before numerical ±10% (No crake is allowed on the part surface after Free drop test) ● After the test ,the part shall meet the specifications without any degradation in appearance and performance
02 High Temp.Storage Test	B°C±2°C RH50% ,240Hr	
03 Temp./Humidity Storage Test	40°C±2°C , RH90-95% 240Hr	
04 Thermal Shock Test	A°C±2°C (1Hr)→ ,20°C±2°C (1Hr) B°C±2°C (1Hr)→ ,20°C±2°C (1Hr)10 cycle	
05 Vibration Test	10-55Hz/1min amplitude1.5mm,X,Y,Z,3 directions	
06 Mechanical Shock Test	+100G,Sine wave, XYZ , 3 impacts per axis	
07 Free Drop Test	The part shall be dropped freely from a height of 75 cm onto concrete 1 time in 2 axes (total 4 times)	
08 Life Burning Test	The part shall be subjected to 1000 hrs in the room temp with rated voltage applied	
09 Lead Wire / Pin Pull Test	The Part checking standard : Following supplier's Spec. Finished-part checking Standard vertical Pull i)100g MIN 0.05mm Thickness of ceramic ii)300g MIN 0.1mm ≤ Thickness of ceramic b: Horizontal Pull i)700g MIN	

Remark : "A"means Storage low temp. "B"means Storage high temp