

MESSRS.

SPECIFICATION FOR APPROVAL

承 認 書

Product	PIEZO BUZZER (EXTERNAL)
Part No.	AZ-2432E-P-LF (RoHS)
Customer Approval	

Approved By	Checked By	Made By
工程部 王台平 MAR-12-2007	工程部 劉民祥 MAR-12-2007	工程部 許俊程 MAR-12-2007



ADVANCED ACOUSTIC TECHNOLOGY CORP.

苙 翔 科 技 股 份 有 限 公 司



ISO 9001 Certified

2F, No.207, Sec. 6, Chung Shan N. Rd., Taipei, Taiwan.

Tel: +886-2-88665255

Fax: +886-2-88665250


<http://www.aatc.com.tw>

AZ-2432E-P-LF

	Items	Units	Specifications	Conditions
01	Rated Voltage	Vp-p	10	Square Wave
02	Operating Voltage(Max)	Vp-p	1-30	
03	Current Consumption(max)	mA	10	
04	Sound Pressure Level	dB	93	At 10cm
05	Resonant Frequency	Hz	3200±500	
06	Operating Temp.	°C	-30 ~ +80	
07	Storage Temp.	°C	-40 ~ +85	
08	Capacitance	pF	25,000 ± 30%	At 1KHz
09	Weight	g	3.7	
10	Lead Pin Material	Red Copper		

Frequency Response Curve.

MODEL:AZ-2432E-P
 X:3.1623kHz Y:99.97dB ZA:Live Curve SSR T. RMS

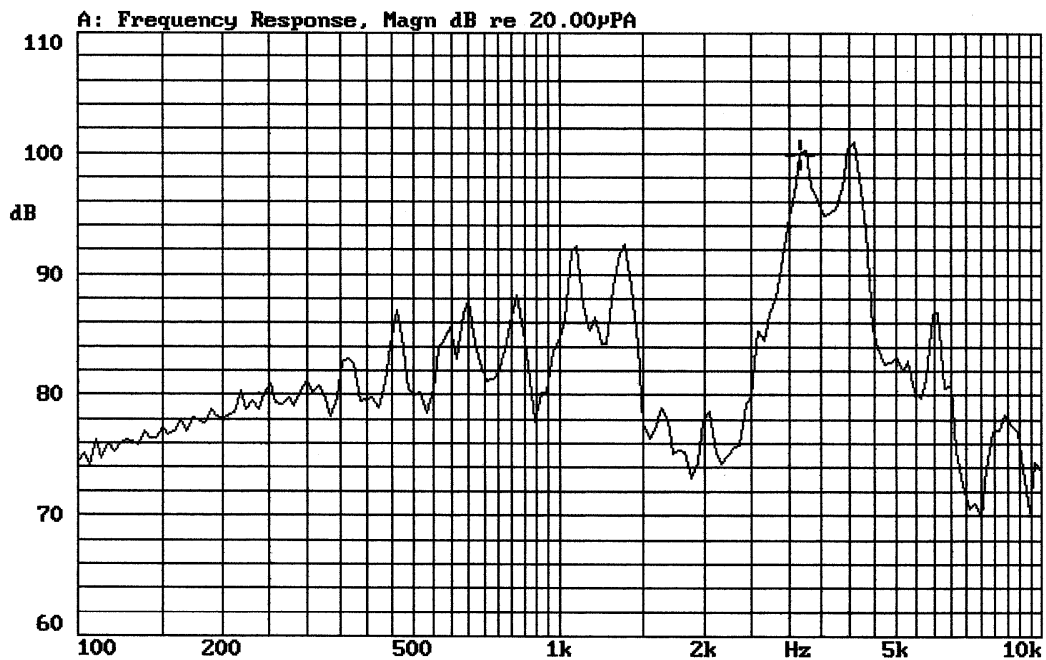

Mode: SSR




REV NO.

REVISION NOTE

APPROVAL

DATE

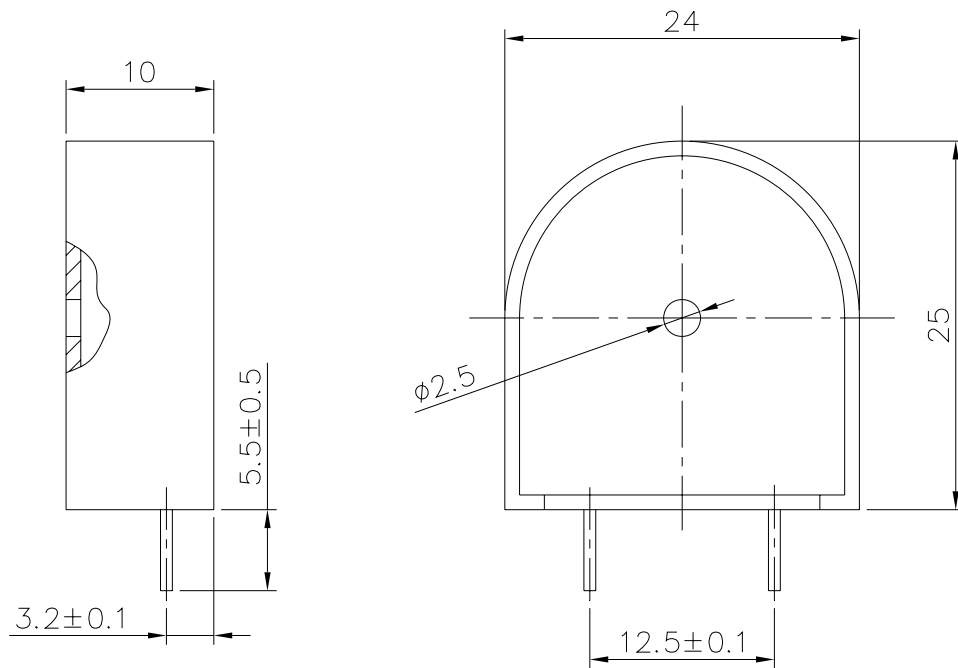

WAVE SOLDER AND WASH NOT ALLOWED

TITLE: <i>PIEZO BUZZER EXTERNAL</i>		DRAWN: <i>JOHN</i> 04/10/2003	SCALE: 2:1	SHEET: 1 : 1
PART NO. <i>AZ-2432E-P-LF</i>		DESIGNED: <i>R & D OF AAT</i>	UNITS: <i>mm</i>	
DWG NO. <i>DTP-1033</i>		CHECKED:	TOLERANCE ± 0.5	
		APPROVAL:	UNLESS OTHERWISE SPECIFIED: ONE PLACE DECIMAL ± *** TWO PLACE DECIMAL ± *** THREE PLACE DECIMAL ± ***	
REV		MATERIAL: <i>MPP0+GLAS</i>		



苙翔科技股份有限公司
ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

4.RELIABILITY TEST

Item		Test conditions	Evaluation standard						
01	High temp.Storage life	The part shall be capable of withstanding a storage Temperature of 85°C for 96 hours.	After the test the part shall meet specifications without Any degradation in appearance and performance except S.P.L S.P.L shall be 74dB or more.						
02	Low temp.Storage life	The part shall be capable of withstanding a storage Temperature of -40°C for 96 hours.							
03	Temp. cycle	The part shall be subjected 5 cycles. One cycle shall consist of; <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="text-align: center;">-40°C</td> <td style="text-align: center;">85°C</td> </tr> <tr> <td style="text-align: center;">30min</td> <td style="text-align: center;">30min</td> </tr> <tr> <td colspan="2" style="text-align: center;">60min</td> </tr> </table>		-40°C	85°C	30min	30min	60min	
-40°C	85°C								
30min	30min								
60min									
04	Temp./Humidity cycle	The part shall be subjected with 90~95% R.H at +40°C for 96 hours.							
05	Free drop	The part only shall be dropped from a height of 75cm onto a 40mm thick wooden board 3 times in 3 axes (X.Y.Z). (a total of 9 times).							
06	Lead Strength	Pull lead with a force of 10N,on the direction of the lead axis for 10 :10±1 sec							
07	Vibration	The part shall be subjected to a vibration cycle of 10Hz to 55Hz to 10Hz in a period of 1 minute. Total peak amplitude shall be 1.52mm (9.3G). The vibration test shall consist of 2 hours per plane in each three mutually perpendicular planes for a total time of 6 hours.							

5.SOLDERING CONDITION

Recommend using constant branding iron in **30W**, and in temperature range **320±10°C**.

Soldering time **2 second**