




# MESSRS.

## SPECIFICATION FOR APPROVAL

### 承 認 書

Product	Dynamic Speaker		
Part No.	AK-36100BB-1		(RoHS)
Approved By	Checked By	Made By	
			

Customer Approval Result	
--------------------------	--



**Advanced Acoustic Technology Corporation**

**笠翔科技 // 常州笠翔电子有限公司**



ISO 9001 Certified

ISO 14001 Certified

QS9000 Certified

Head Office / 2F, No.207, Sec. 6, Chung Shan N. Rd., Taipei, Taiwan

Tel: +886-2-8866-5255 Fax: +886-2-8866-5250

大陸總公司 / 中國江蘇省常州市新北區龍虎塘工業園新苑四路 89 號

Tel: +86-519-8511-1583 Fax: +86-519-8510-0908

http:// [www.aatc.com.tw](http://www.aatc.com.tw) [www.aatc.com.cn](http://www.aatc.com.cn)

EDITION:1.2

# 1.SPECIFICATION

# AK-36100BB-1(ROHS)

01	Type	Dynamic speaker	
02	Dimension	External diameter 36 mm	
03	Rated Input Power	0.3 W	
04	Impedance	100 ohm $\pm$ 15% at 2000Hz	
05	Resonance Frequency (Fo)	650 Hz $\pm$ 20% at Fo, 1V	
06	Sensitivity (S.P.L.)	92dB(0.1W/0.1m) $\pm$ 3 dB	at AVE 1.0,1.2,1.5,1.8 KHz.
		96dB(0.3W/0.1m) $\pm$ 3 dB	
07	Frequency Range	Fo – 6KHz	
08	Distortion	Less than 10 % at 2000Hz ,0.3 W	
09	Max. Input Power	Must be normal at 0.5W white noise for 1 minute.	
10	Voice Coil	Diameter 13.5 mm	
11	Magnet	Rare earth permanent (NdFeB) magnet $\Phi$ 12.8 X 1.5 mm	
12	Weight	g	
13	Appearance	Should not exist any obstacle to be harmful to normal operation; damages, cracks, rusts and distortions, etc.	
14	Operation Test	Must be normal at program source 0.3W	
15	Buzz, Rattle, etc.	Should not be audible at 5.48V sine Wave between Fo to 20KHz	
16	Polarity	When positive voltage is applied to the terminal marked (+), diaphragm should move to the front.	
17	Terminal Strength	Capable of withstand 1kg load for 30 seconds without resulting in any damage or rejection.	
18	Temperature	Operating temperature: -20°C to +60°C	
		Storage temperature: -25°C to +70°C	

## 2.Measurement Condition

### 2-1 .Test Condition

#### STANDARD

Temperature : 5 ~ 35°C

Relative humidity : 45% ~ 85%,

Atmospheric pressure : 860mbar to 1060mbar.

#### JUDGEMENT

Temperature : 20±3°C

Relative humidity : 60% ~ 70%,

Atmospheric pressure : 860mbar to 1060mbar

### 2-2 . Standard Test Fixture

1.Input Power : 0.3W(5.48V)


2.Zero Level : -dB

3Mode : SPEAKER

4.potentiometer Range : 50dB

5.Sweep Time : 0.5sec


### Standard test condition of speaker

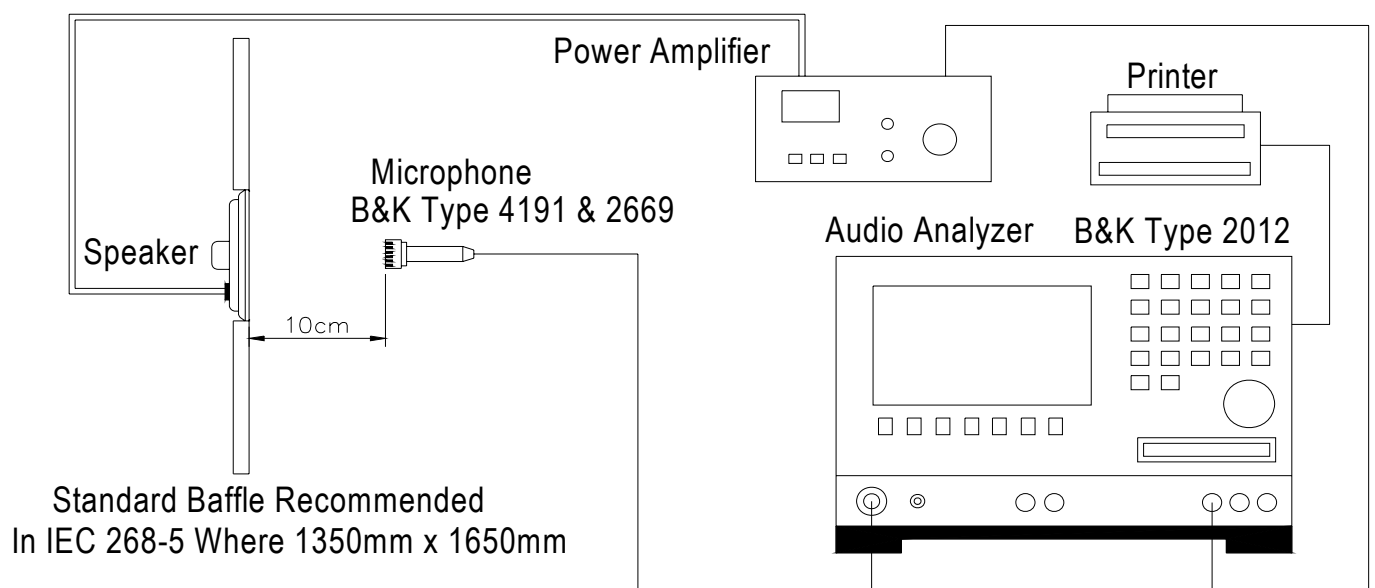

# Frequency Response Curve

X:1.0000kHz \*Y:96.90dB ZA:Live Curve SSR Fund.

A: Frequency Response, Magn dB re 20.00μPA

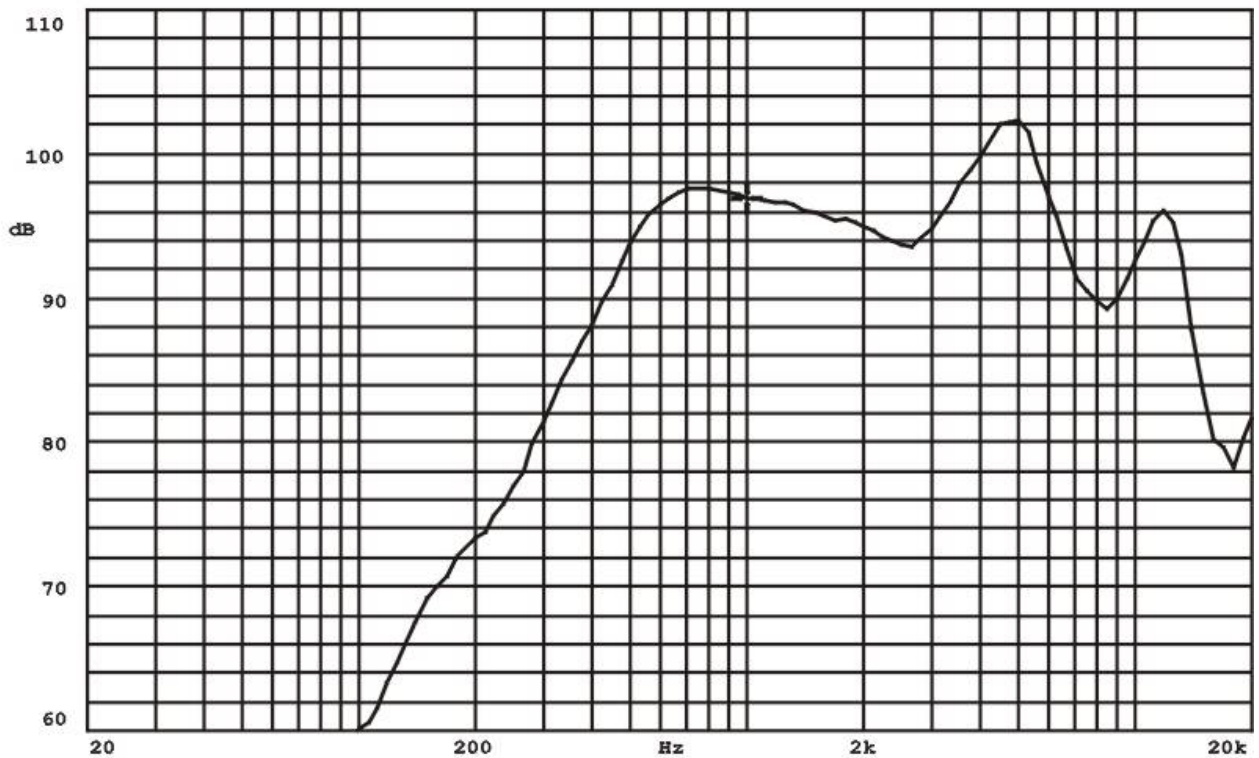

18-AUG-2009 15:26:03

Mode: SPEAKER




# Impedance Curve

IMPEDANCE MEASUREMENTS: Measurement of Impedance  $Z(j\omega)$

X:670.00Hz Y:127.2Ω ZA:Live Curve Impedance

A: Impedance, Magn [Ω]

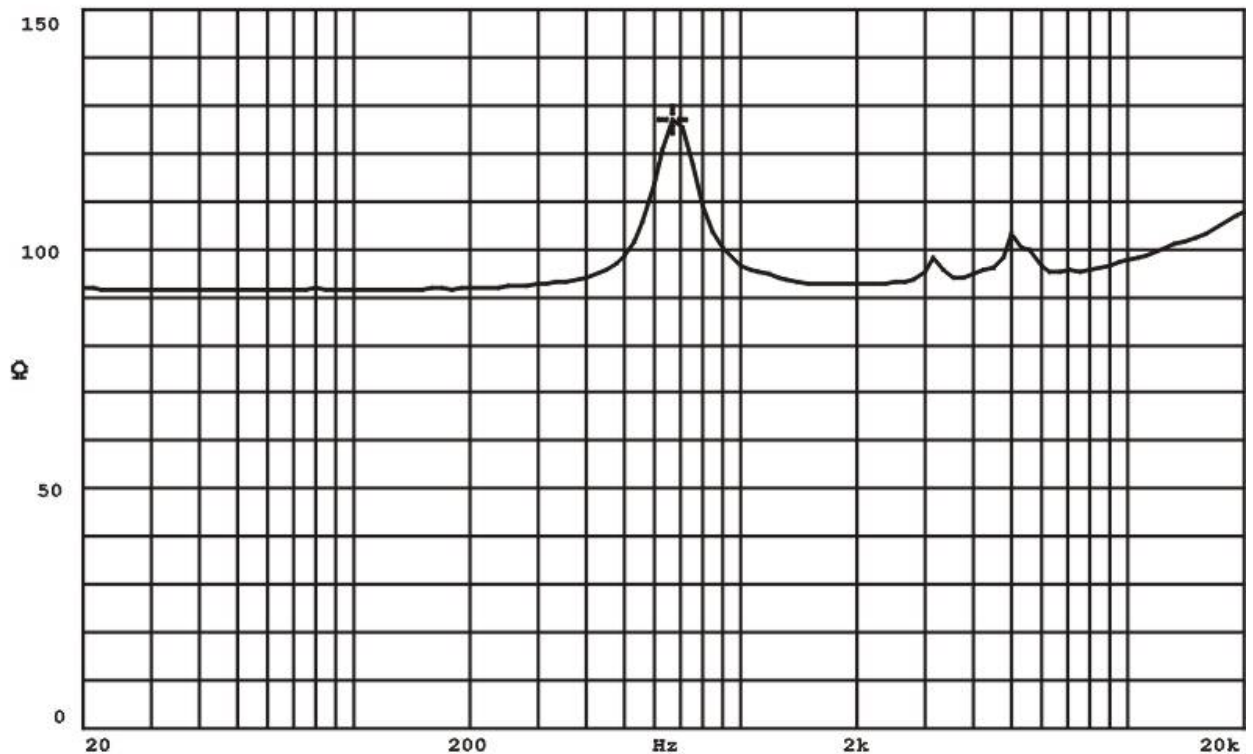


18-AUG-2009 15:18:04

Mode:  $Z(j\omega)$



REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

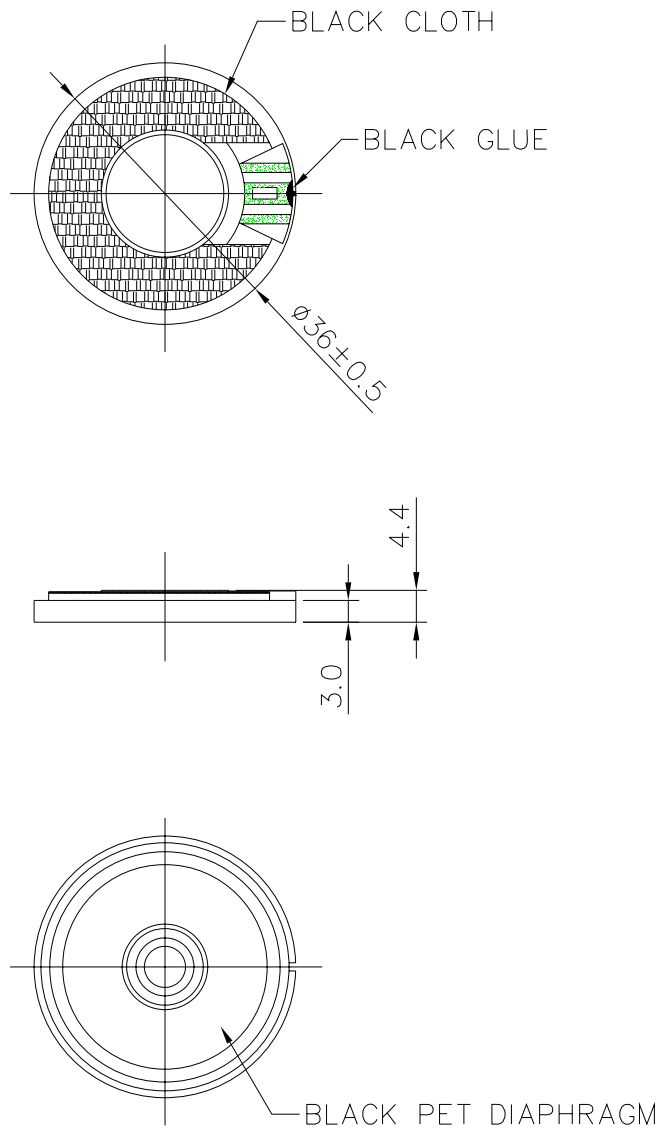

TITLE: DYNAMIC SPEAKER		DRAWN: Lemon	2009-8-7	SCALE: 1:1	SHEET: 1 of 1
PART NO. AK-36100BB-1		DESIGNED: R&D OF AAT		UNITS: mm	
DWG NO. CA-K09080701		CHECKED:		TOLERANCE $\pm 0.3$	
		APPROVAL:		UNLESS OTHERWISE SPECIFIED:	
	REV 1	MATERIAL: ABS		ONE PLACE DECIMAL $\pm$ ***	
				TWO PLACE DECIMAL $\pm$ ***	
				THREE PLACE DECIMAL $\pm$ ***	



笠翔科技股份有限公司  
ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

## 4.RELIABILITY TESTS

Items.		Specifications
01	High temp. Test	Keep 96 hours at $+70^{\circ}\text{C}\pm 3^{\circ}\text{C}$ and leave 3 hours in normal temperature and then check
02	Low temp. Test	Keep 96 hours at $-25^{\circ}\text{C}\pm 3^{\circ}\text{C}$ and leave 3 hours in normal temperature and then check
03	Humidity test	Keep 96 hours at $+60^{\circ}\text{C}\pm 3^{\circ}\text{C}$ relative humidity 95% and leave 3 hours in normal temperature and then checked.
04	Temp./Humidity cycle	<p>The part shall be subjected 5 cycles. One cycle shall be 12 hours and consist of;</p>
05	Thermal cycle test.	Low temperature: $-25^{\circ}\text{C}\pm 3^{\circ}\text{C}$ , temperature: $+70^{\circ}\text{C}\pm 3^{\circ}\text{C}$ , cycle: 1 hour/cycle each, and then keep 5 cycles in a room.
06	Vibration	10~55~10Hz sin-wave sweep 15min. 5G(constant) X,Y, Z 3 direction. 2 hours each, total 6 hours.
07	Fix drop test	Fix on jig. Then drop from 152cm height to the concrete floor X,y, z 6 direction. 5 times each, total 30 times.
08	Free drop test	Free drop from 100cm height to the concrete floor X,Y, Z 6 direction. 1 times each, total 6 times.
09	Load test	Rated Power White noise is applied for 96 hours
10	Max Power test	Max power 1 min. on - 2 min. off 10 cycles.
11	Terminal strength test	Capable of withstand 1kg load for 30 seconds without resulting in any damage or rejection.
<p>Criterion :</p> <p>After these test , the change of S.P.L shall be within <math>\pm 3</math> dB</p>		

## SOLDERING CONDITION

Recommend using constant branding iron in 30W, and in temperature range  $350\pm 10^{\circ}\text{C}$ .

Soldering time 2 seconds.